

# TIP-600V


Fiber Optic Connector Inspection System




## Product characteristics

- Rotary metal bracket, stable and convenient.
- Compatible / FC/SC/ST/LC/SC female connector/LC male connector
- 4000mAH large capacity lithium power, 20 hours standby.
- real time video, support extend t-flash card ,quick check the pollution degree of female connector and male conector
- 400 times magnification, the stain is clearly visible.
- 3.5 inch HD LCD display.
- 1/3 inch sensor, 300,000 effective pixels.
- removable Silicon Case, reduce the damage by collising or dropping in a certain extent
- Small size, one-handed, convenient and fast.

## SUPPORT INTERFACE

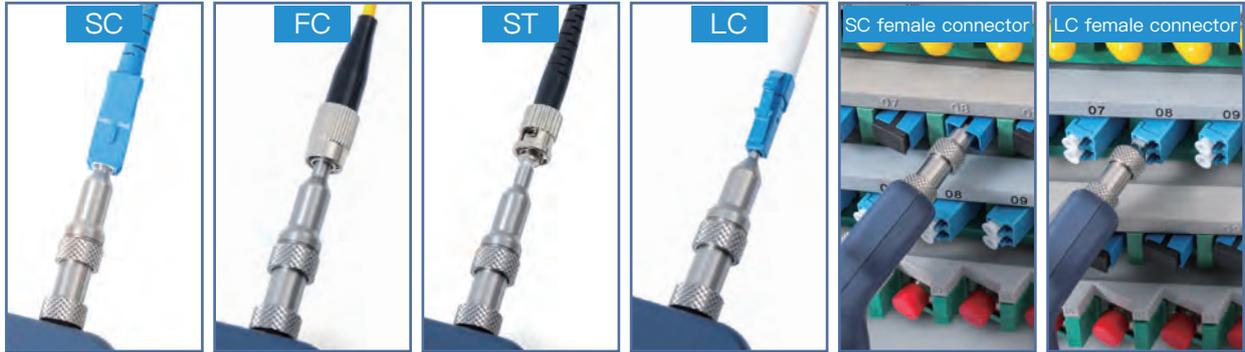

## USE DISPLAY

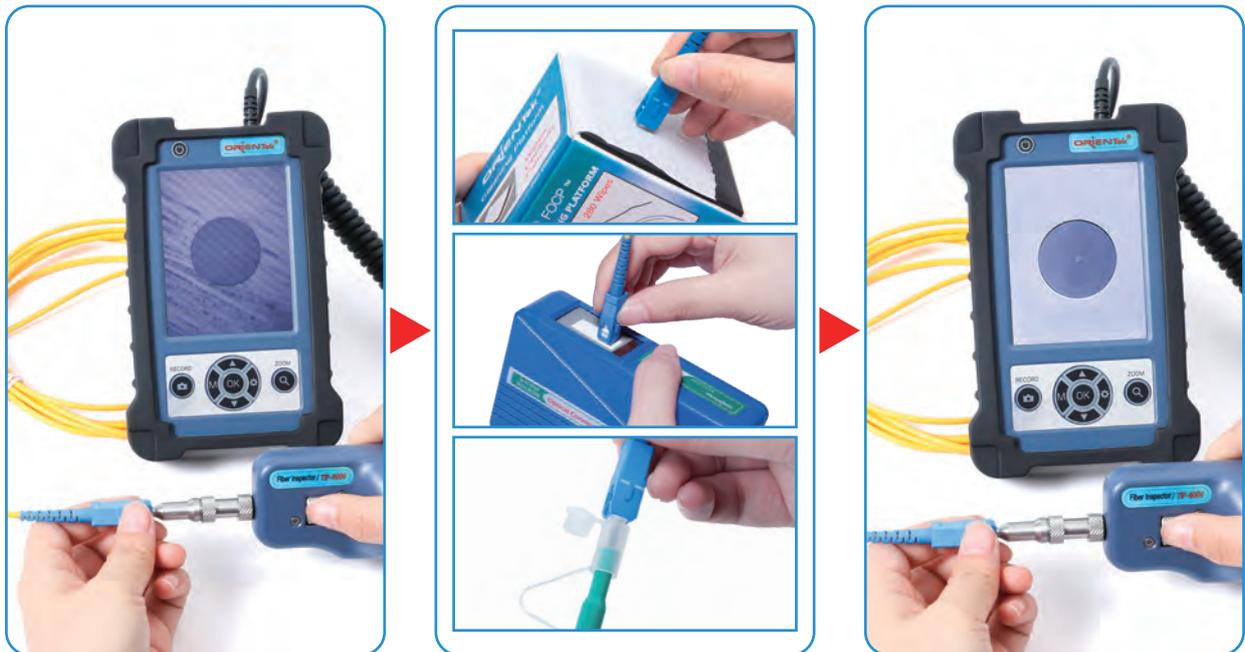


## PRODUCT CHARACTERISTICS



20 hours



4000mAh



recycled

The machine is equipped with large capacity lithium-ion batteries with a capacity of up to 4000 mAh. Standby time is up to 20 hours, which is suitable for the needs of workers who go out for a long time. The machine adopts micro USB interface, charging standard is 3.7v, charging is more convenient and simple.

The angle of the bracket can be adjusted by rotation at will, which is stable and convenient. From the perspective of ergonomics, there is no need to watch on a single hand-held screen. In line with ergonomics, comfortable grip, compact, light and durable. Full enclosure design, cushioning impact friction. Close protection, anti-falling, anti-seismic. Split type design is better on protection, reduce the damage by colliding or dropping in a certain extent.



real time  
video



support extend  
TF card



Video  
playback

Real-time video recording and expansion of TF card, convenient and fast recording of measurement information. Support data playback to facilitate inspection and data statistics. The panel design is concise, the operation is simple and practical, and the use is more humanized.

## PRODUCT SPECIFICATION:

KIP-600V probe		Magnification	400X
		Resolution( $\mu\text{m}$ )	surpass 1.0
		Visual range( $\mu\text{m}$ )	0.316*0.285
		Dimension( $\mu\text{m}$ )	235(W)*95(D)*30(H)
		Image Sensor	1/3 480
		Storage Temperatruue	-18°C~35°C
		Weight(kg)	0.11
3.5-inch LCD display	Image	Image size(mm)	22
		Pixels	307200
	Video	Frequency	25FPS
		LCD screen	960*240 LCD
		Video output mode	NTSC/PAL
		Playback Format	AVI
	User interface	Compatible memory cards	TF
		Capacity	8GB
		USB	1.1/2.0
		Hard disk format	FAT32
	Power supply	AC adapter	DC 5V/2A
		Internal Battery	Lithium battery 4000Mah
		Media Player	$\geq 7$
Weight(kg)/W*D*H(mm)		0.085/78*22*56	

## PRODUCT LIST:



## CONTACT US:

OrienTek Optical Technology Ltd.

## HEAD OFFICE:

Jianshan Industry Park, Liuhe District, Nanjing, Jiangsu, China

TEL: (+86) 25 8687 0598

FAX: (+86) 25 8687 0598

[www.orientekot.com](http://www.orientekot.com)

[sales@orientekot.com](mailto:sales@orientekot.com)

### Export Control Regulations

The products and/or technical information presented in this publication may be subject to the application of the Foreign Exchange and Foreign Trade Act and other related laws and regulations in China.

In addition, the Export Administration Regulations (EAR) of the United States may be applicable.

In cases where exporting or reexporting the products and/or technical information presented in this publication, customers are requested to follow the necessary procedures at their own responsibility and cost. Please contact the Ministry of Economy, Trade and Industry of China or the Department of Commerce of the United States for details about procedures.