

T-10


Visual Fault Locator



Key Features

- Bright red laser at 650nm
- Pulsed and CW operation
- Outpower: 1mw,10mw,20mw,30mw
- 2.5mm universal connector
- 40 hours of operation(1mW)
- Pocket size design
- 1.25 mm adapter for LC (optional)

Time saving and high efficiency

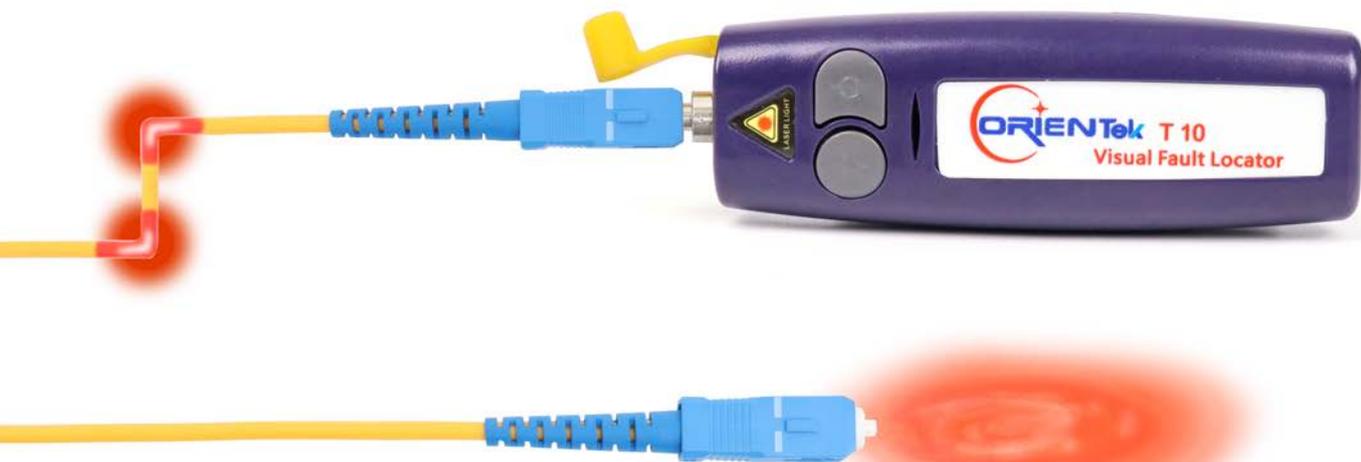

Support four interface fiber types



ST



FC



SC



LC (optional)

PRODUCT SPECIFICATION:

Model	T-10-1	T-10-10	T-10-20	T-10-30
Power range	1mW (default)	10mW	20mW	30mW
Test distance	About 3-5km	About 10km	About 15km	About 20km
Working hours	40	20	15	8
Output Wavelength	650nm			
Laser type	FP-LD			
2Hz	Yes			
Connector type	2.5mm universal connector for FC,SC,ST;1.25mm LC optional			
Operating Temperature	-10°C~60°C			
Storage Temperature	-20°C~70°C			
Battery	AAA*2			
Without battery	40g			
Dimensions	120*35*20mm			

CONTACT US:

OrienTEK Optical Technology Ltd.

HEAD OFFICE:

Huaqiao Building, Qinheng Technology Park, North Bridge road,

Nanjing, Jiangsu, China

TEL: + 86 25 8687 0518

FAX: + 86 25 8687 0518

www.orientekot.com

sales@orientekot.com

Export Control Regulations

The products and/or technical information presented in this publication may be subject to the application of the Foreign Exchange and Foreign Trade Act and other related laws and regulations in China.

In addition, the Export Administration Regulations (EAR) of the United States may be applicable.

In cases where exporting or reexporting the products and/or technical information presented in this publication, customers are requested to follow the necessary procedures at their own responsibility and cost. Please contact the Ministry of Economy, Trade and Industry of China or the Department of Commerce of the United States for details about procedures.